




Product

E10 Based LED bulb

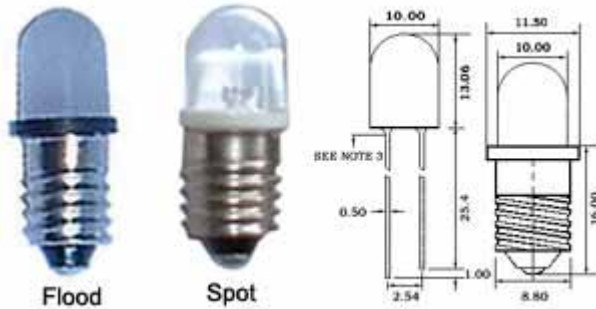

FEATURES:

- Long life LED-operating 50,000hrs
- Easy installation using existing socket
- Major power savings
- Voltage: 6VDC 12VDC option
- Choice of 5 colors
- Lamp base: E10

LED LAMP DATA

| P/N | LED Color | Voltage | Intensity (lm) | Wavelength (nm) | Viewing Angle |
|-----------------|-----------------------|------------|----------------|-----------------|---------------|
| GNL-T10/E10-URC | Ultra Red/Clear | 6VDC/12VDC | 1.5 | 625 | 20° |
| GNL-T10/E10-URW | Ultra Red/Diffused | 6VDC/12VDC | 1.5 | 625 | 60° |
| GNL-T10/E10-UYC | Ultra Yellow/Clear | 6VDC/12VDC | 1.5 | 590 | 20° |
| GNL-T10/E10-UYW | Ultra Yellow/Diffused | 6VDC/12VDC | 1.5 | 590 | 60° |
| GNL-T10/E10-UBC | Ultra Blue/Clear | 6VDC/12VDC | 1.2 | 470 | 20° |
| GNL-T10/E10-UBW | Ultra Blue/Diffused | 6VDC/12VDC | 1.2 | 470 | 60° |
| GNL-T10/E10-UGC | Ultra Green/Clear | 6VDC/12VDC | 2.2 | 520 | 20° |
| GNL-T10/E10-UGW | Ultra Green/Diffused | 6VDC/12VDC | 2.2 | 520 | 60° |
| GNL-T10/E10-UWC | Cool White/Clear | 6VDC/12VDC | 2.1 | 5500k-7000k | 20° |
| GNL-T10/E10-UWW | Cool White/Diffused | 6VDC/12VDC | 2.1 | 5500k-7000k | 60° |